

PRODUCT FEATURES

castors (not legs).

separately).

• Complete with stainless steel top.

• Standard with 4 shelves / 2 doors.

• 2 years parts and labour warranty.


• Comes standard with 4 x lockable (115 mm)

• Optional Adjustable legs 150 - 180mm (Sold

127

EVAPORATING PAN (DEFROST)

TECHNICAL DRAWING

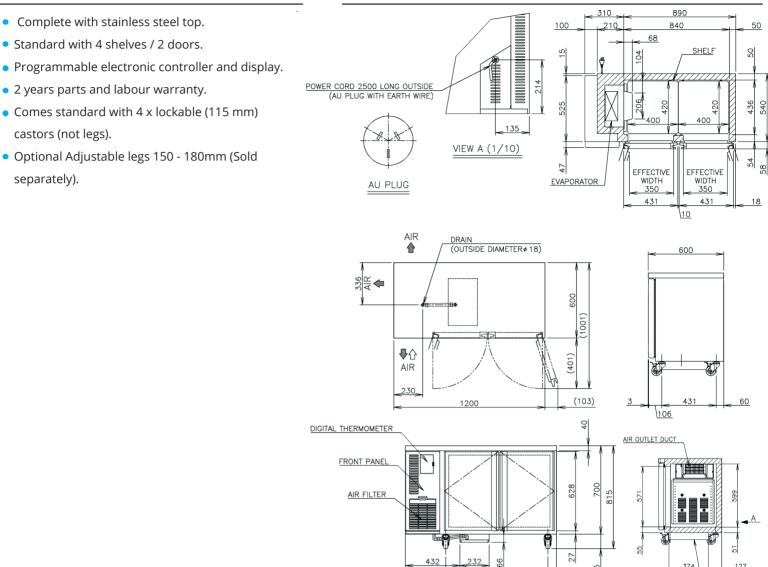

PRODUCT SPECIFICATION

810

320

tainless steel, ABS Plastic (Doors)
tainless steel, Galvanized Steel (Rear/Bottom), \BS plastic (Front Panel)
231L
Aicroprocessor controlled adjustable from -2 to
2°C
in & Tube type
200mm (W) x 600mm (D) x 815mm(H)
840mm (W) x 436mm (D) x 599mm (H)
orced Air Circulation
57 / 100
PHASE 230 50Hz
Rated: 1.9A
134A / 240g
Ambient Temp.: 5-38°C
/oltage Range: Rated Voltage ±6%

115 70



Descriptions and specifications are subject to change at any time, without notice. Illustrations for demonstration purposes.

Copyright © 2019 Hoshizaki Lancer Pty Ltd. All right reserved. E&OE Date: May 2019

