


PRODUCT FEATURES

- Split doors and Upright series.
- Stainless steel interior and exterior.
- Programmable electronic controller and display.
- Standard with 8 x shelves.
- 2 years parts and labour warranty.
- Comes standard with 4 x lockable (115 mm) castors (not legs).
- Optional Adjustable legs 150 180mm (Sold separately).

TECHNICAL DRAWING



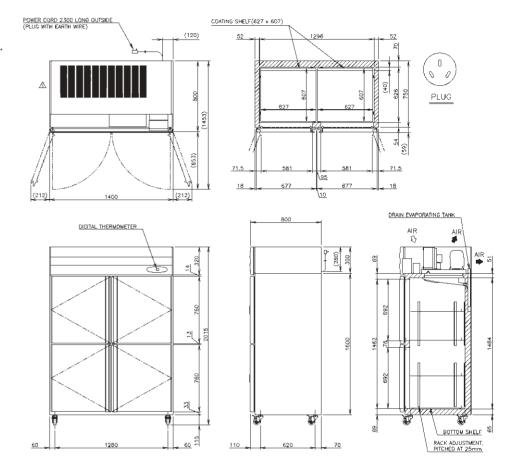

PRODUCT SPECIFICATION

Interior	Stainless Steel, ABS Plastic (Doors),
Exterior	Stainless Steel, Galvanized Steel (Rear, Bottom)
Effective Capacity	1217L
Temperature Control	Microprocessor adjustable
	from -2°C to 12°C
Evaporator	Fin & Tube type
Outside Dimensions	1400mm (W) x 800mm (D) x 2015mm (H)
Inside Dimensions	1296mm (W) x 626mm (D) x 1484mm (H)
Refrigeration System:	Forced Air Circulation
Weight Net/Gross (kg)	165 / 199
AC Supply Voltage	1 PHASE 220 - 240V 50Hz
Amperage	Rated: 2.85A Starting: 12A
Refrigerant	R134A / 240g
Operating Conditions	Ambient Temp.: 5-43°C
	Voltage Range: Rated Voltage ±6%









