

HOSHIZAKI




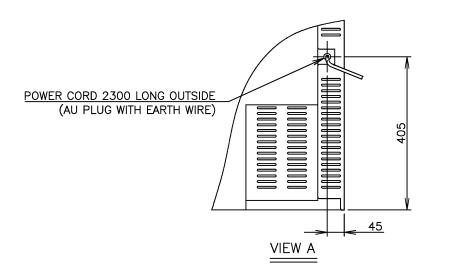

- 1. Install the product properly in accordance with the instructions on location, electrical connections stated in the instruction manual provided.


 Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).
- 2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 32°C and power supply of 230V 50Hz. The amperage and electric consumption are based on measurements at ambient temperature of 32°C and power supply of 230V 50Hz.
- 3. The cabinet temperature range of -6 to 12° C is guaranteed at ambient temperature of 30° C.
- 4. Product code: T012-C824

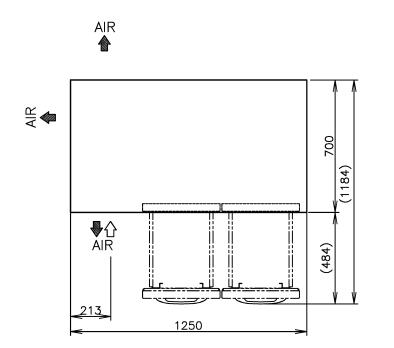


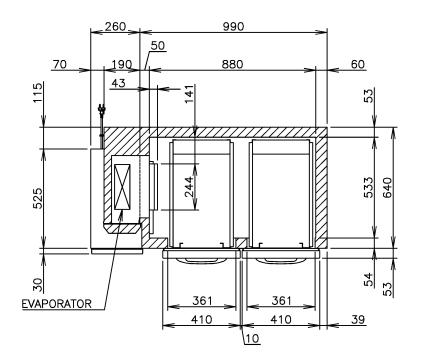


ITEM	Hoshizaki Drawer Type Undercounter Refrigerator					
MODEL	RTC-125DEA-GN-4D					
POWER SUPPLY	1 Phase 220-240V 50Hz Capacity: 0.54kVA(2.5A)					
AMPERAGE	Rated: 2.2A					
ELECTRIC CONSUMPTION	Motor: *W(Power Factor: *%) Heater: 193W Refrigeration: *W Defrost: 193W					
HEAT REJECTION	*W					
POWER CORD	2.3m (Plug with Earth Wire)					
EFFECTIVE CAPACITY	270L					
OUTSIDE DIMENSIONS	1250mm(W) x 750mm(D) x 815mm(H)					
INSIDE DIMENSIONS	880mm(W) x 533mm(D) x 588mm(H)					
EXTERIOR	Stainless Steel, Galvanized Steel (Rear/Bottom)					
INTERIOR	Stainless Steel, ABS Plastic					
INSULATION	Polyurethane Foam					
INSULATION FOAM BLOWING AGENT	Cyclopentane					
REFRIGERATION SYSTEM	Forced Air Circulation					
DEFROST SYSTEM	Glass Tube Heater					
COMPRESSOR	Hermetic 215W					
CONDENSER	Fin and Tube type, Air—cooled					
EVAPORATOR	Fin and Tube Type					
REFRIGERANT	R134a/150g					
TEMPERATURE CONTROL	Microprocessor (Digital Temp Indication) Adjustable from -6 to 12°C					
DEFROST CONTROL	Microprocessor Controlled					
ELECTRIC CIRCUIT PROTECTION	Fuse, Earth Wire					
REFRIGERANT CIRCUIT PROTECTION	Motor Protector					
LEG	Urethane (76mm DIA, 115mm HIGH)					
WEIGHT	101kg (Gross Approx. *kg)					
PACKAGE	Carton 1315mm(W) x 780mm(D) x 950mm(H)					
OPERATING CONDITIONS	Ambient Temperature: 5—43° C Voltage Range: Rated Voltage±6%					
*We receive the right t	o make changes in specifications and design without prior notice.					

*We reserve the right to make changes in specifications and design without prior notice.

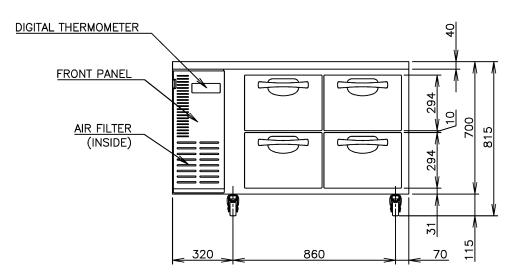

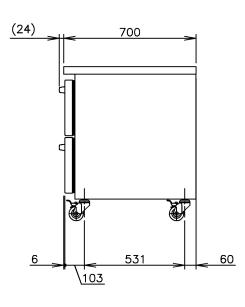

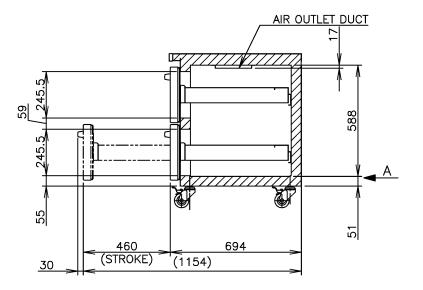

	APPROVED CHECKED KAWAKAMI WANG * *				DESIGNED LIU	DRAWN ZHANG		SCALE 1	/20	TRIGON	IOMETRY
			****	** DATE		DRAWING N		1500			
	APPROVED	DESIG	SNED	SYMBOL	DATE		2019	3.02.15	J D2	4508	