

HOSHIZAKI

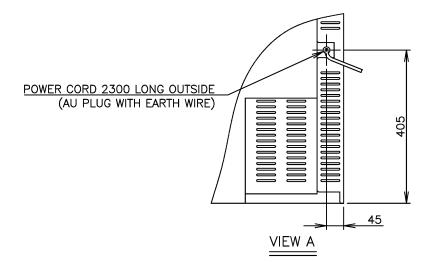

AIR

₽Û

¥ **₩**



pipe connections). 2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 32° C and power supply of 230V 50Hz. The amperage and electric consumption are based on measurements at ambient temperature of 32°C

1. Install the product properly in accordance with

stated in the instruction manual provided.

the instructions on location, electrical connections

Allow 10mm extra space at the installation site to

meet any installation requirements (additional

spacing is also required for proper air flow and


and power supply of 230V 50Hz.


3. The cabinet temperature range of -6 to 12° C is guaranteed at ambient temperature of 30°C.

4. Product code: T012-C804




(1184)

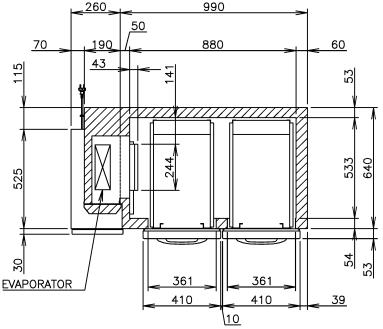


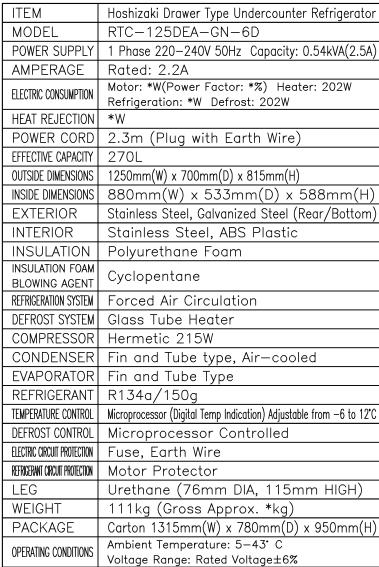


*We reserve the right to make changes in specifications and design without prior notice.

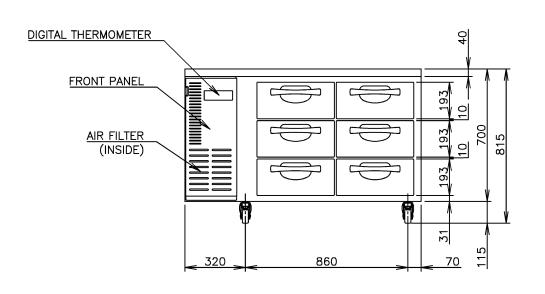

1250



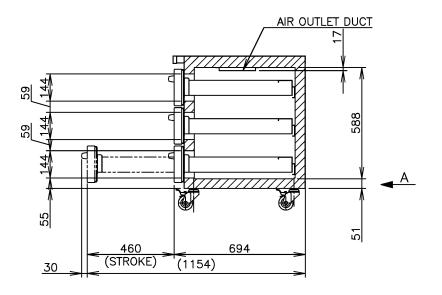

APPRO\ KAWAK		ECKED /ANG	DESIGNED LIU		AWN HANG	SCALE 1	/20	TRIGON	OMETRY
*	*		****		DATE		DRAWING NO.		SYMBOL
APPROVED	APPROVED DESIGNED SYME		DATE	DATE		9.02.15	 D24509		