



HOSHIZAKI




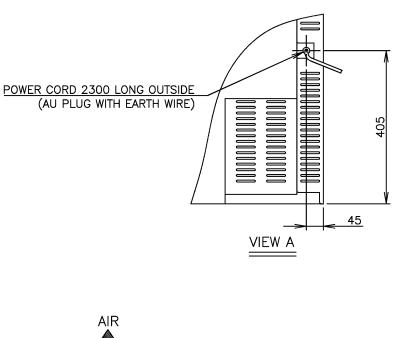




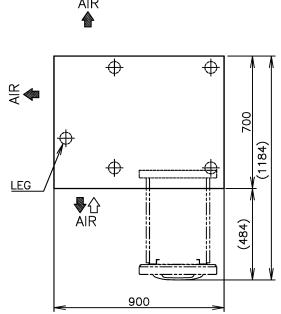

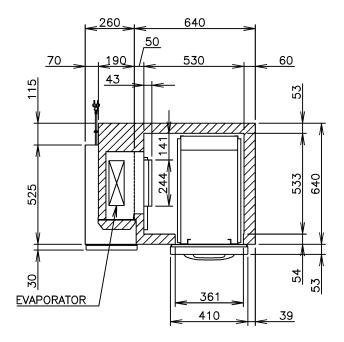

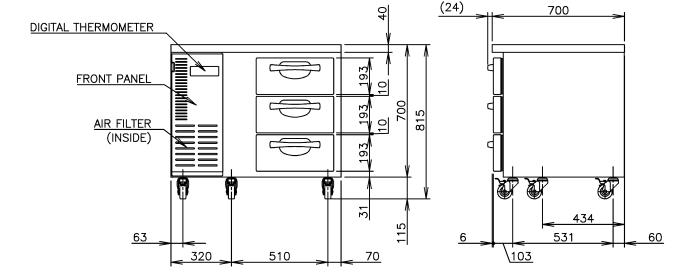

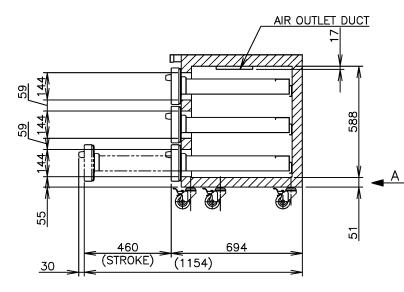

ITEM	Hoshizaki Drawer Type Undercounter Freezer
MODEL	FTC-90EDA-GN-3D
POWER SUPPLY	1 Phase 220—240V 50Hz Capacity: 0.78kVA (3.6A)
AMPERAGE	Rated: 3.0A
ELECTRIC CONSUMPTION	Motor: *W(Power Factor: *%) Heater: 362W Refrigeration: *W Defrost: 362W
HEAT REJECTION	*W
POWER CORD	2.3m (Plug with Earth Wire)
EFFECTIVE CAPACITY	160L
OUTSIDE DIMENSIONS	900mm (W) x 700mm (D) x 815mm (H)
INSIDE DIMENSIONS	530mm (W) x 533mm (D) x 588mm (H)
EXTERIOR	Stainless Steel, Galvanized Steel (Rear / Bottom)
INTERIOR	Stainless Steel, ABS Plastic
INSULATION	Polyurethane Foam
INSULATION FOAM BLOWING AGENT	Cyclopentane
REFRIGERATION SYSTEM	Forced Air Circulation
REFRIGERATION SYSTEM DEFROST SYSTEM	Forced Air Circulation Glass Tube Heater
DEFROST SYSTEM	Glass Tube Heater
DEFROST SYSTEM COMPRESSOR	Glass Tube Heater Hermetic 315W
DEFROST SYSTEM COMPRESSOR CONDENSER	Glass Tube Heater Hermetic 315W Fin and Tube type, Air—cooled
DEFROST SYSTEM COMPRESSOR CONDENSER EVAPORATOR	Glass Tube Heater Hermetic 315W Fin and Tube type, Air—cooled Fin and Tube Type R404A/200g
DEFROST SYSTEM COMPRESSOR CONDENSER EVAPORATOR REFRIGERANT	Glass Tube Heater Hermetic 315W Fin and Tube type, Air—cooled Fin and Tube Type R404A/200g
DEFROST SYSTEM COMPRESSOR CONDENSER EVAPORATOR REFRIGERANT TEMPERATURE CONTROL	Glass Tube Heater Hermetic 315W Fin and Tube type, Air—cooled Fin and Tube Type R404A/200g Microprocessor (Digital Temp Indication) Adjustable from -25 to -7°C
DEFROST SYSTEM COMPRESSOR CONDENSER EVAPORATOR REFRIGERANT TEMPERATURE CONTROL DEFROST CONTROL	Glass Tube Heater Hermetic 315W Fin and Tube type, Air—cooled Fin and Tube Type R404A/200g Microprocessor (Digital Temp Indication) Adjustable from -25 to -7°C Microprocessor Controlled
DEFROST SYSTEM COMPRESSOR CONDENSER EVAPORATOR REFRIGERANT TEMPERATURE CONTROL DEFROST CONTROL ELECTRIC CIRCUIT PROTECTION	Glass Tube Heater Hermetic 315W Fin and Tube type, Air—cooled Fin and Tube Type R404A/200g Microprocessor (Digital Temp Indication) Adjustable from -25 to -7°C Microprocessor Controlled Fuse, Earth Wire
DEFROST SYSTEM COMPRESSOR CONDENSER EVAPORATOR REFRIGERANT TEMPERATURE CONTROL DEFROST CONTROL ELECTRIC CIRCUIT PROTECTION REFRIGERANT CIRCUIT PROTECTION	Glass Tube Heater Hermetic 315W Fin and Tube type, Air—cooled Fin and Tube Type R404A/200g Microprocessor (Digital Temp Indication) Adjustable from -25 to -7°C Microprocessor Controlled Fuse, Earth Wire Motor Protector Urethane (76mm DIA, 115mm HIGH) 86kg (Gross Approx. *kg)
DEFROST SYSTEM COMPRESSOR CONDENSER EVAPORATOR REFRIGERANT TEMPERATURE CONTROL DEFROST CONTROL ELECTRIC CIRCUIT PROTECTION REPROGRAMIT CIRCUIT PROTECTION LEG	Glass Tube Heater Hermetic 315W Fin and Tube type, Air—cooled Fin and Tube Type R404A/200g Microprocessor (Digital Temp Indication) Adjustable from -25 to -7°C Microprocessor Controlled Fuse, Earth Wire Motor Protector Urethane (76mm DIA, 115mm HIGH) 86kg (Gross Approx. *kg) Carton 965mm (W) x 780mm (D) x 950mm (H)
DEFROST SYSTEM COMPRESSOR CONDENSER EVAPORATOR REFRIGERANT TEMPERATURE CONTROL DEFROST CONTROL ELECTRIC CIRCUIT PROTECTION RETRICEMATI CIRCUIT PROTECTION LEG WEIGHT PACKAGE	Glass Tube Heater Hermetic 315W Fin and Tube type, Air—cooled Fin and Tube Type R404A/200g Microprocessor (Digital Temp Indication) Adjustable from -25 to -7°C Microprocessor Controlled Fuse, Earth Wire Motor Protector Urethane (76mm DIA, 115mm HIGH) 86kg (Gross Approx. *kg) Carton 965mm (W) x 780mm (D) x 950mm (H) Ambient Temperature: 5-43°C
DEFROST SYSTEM COMPRESSOR CONDENSER EVAPORATOR REFRIGERANT TEMPERATURE CONTROL DEFROST CONTROL ELECTRIC CIRCUIT PROTECTION LEG WEIGHT PACKAGE OPERATING CONDITIONS	Glass Tube Heater Hermetic 315W Fin and Tube type, Air—cooled Fin and Tube Type R404A/200g Microprocessor (Digital Temp Indication) Adjustable from -25 to -7°C Microprocessor Controlled Fuse, Earth Wire Motor Protector Urethane (76mm DIA, 115mm HIGH) 86kg (Gross Approx. *kg) Carton 965mm (W) x 780mm (D) x 950mm (H)

- 1. Install the product properly in accordance with the instructions on location, electrical connections stated in the instruction manual provided. Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).
- 2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 32° C and power supply of 230V 50Hz. The amperage and electric consumption are based on measurements at ambient temperature of 32°C and power supply of 230V 50Hz.

 3. The cabinet temperature range of -25 to -7° C is
- guaranteed at ambient temperature of 30°C.
- A 4. Product code: T018-C814(For HL)