


## **HOSHIZAKI**




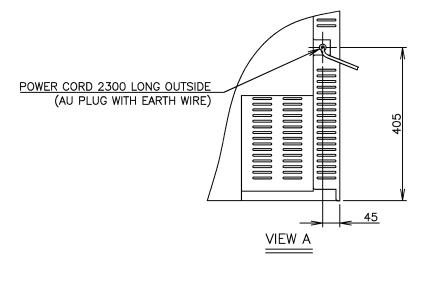


AU PLUG

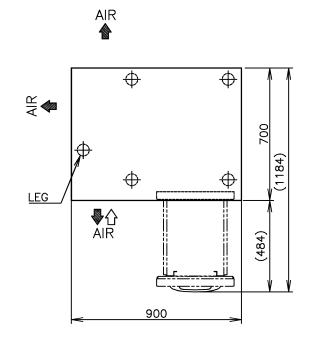

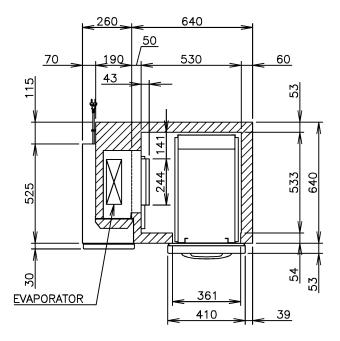

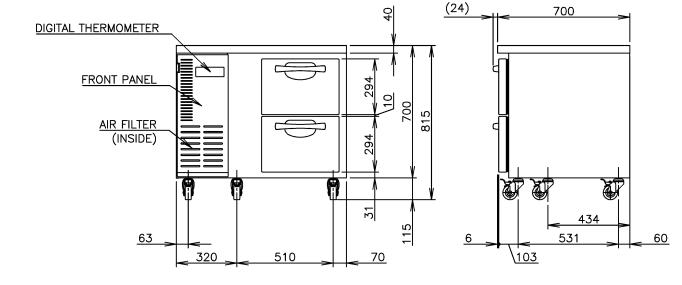

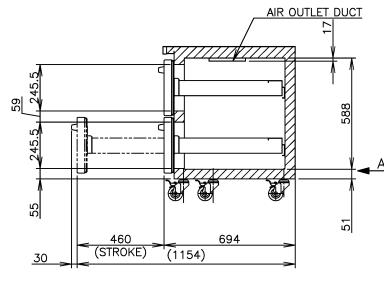

ITEM	Hoshizaki Drawer Type Undercounter Refrigerator					
MODEL	RTC-90DEA-GN-2D					
POWER SUPPLY	1 Phase 220—240V 50Hz Capacity: 0.42kVA(1.91A)					
AMPERAGE	Rated: 1.5A					
ELECTRIC CONSUMPTION	Motor: *W(Power Factor: *%) Heater: 181W Refrigeration: *W Defrost: 181W					
HEAT REJECTION	*W					
POWER CORD	2.3m (Plug with Earth Wire)					
EFFECTIVE CAPACITY	160L					
OUTSIDE DIMENSIONS	900mm(W) x 700mm(D) x 815mm(H)					
INSIDE DIMENSIONS	$530mm(W) \times 533mm(D) \times 588mm(H)$					
EXTERIOR	Stainless Steel, Galvanized Steel (Rear/Botton					
INTERIOR	RIOR Stainless Steel, ABS Plastic					
INSULATION	Polyurethane Foam					
INSULATION FOAM BLOWING AGENT	I ('Volopontano					
REFRIGERATION SYSTEM	Forced Air Circulation					
DEFROST SYSTEM	Glass Tube Heater					
COMPRESSOR	Hermetic 110W					
CONDENSER	Fin and Tube type, Air—cooled					
EVAPORATOR	Fin and Tube Type					
REFRIGERANT	R134a/160g					
TEMPERATURE CONTROL	Microprocessor (Digital Temp Indication) Adjustable from -6 to 12°C					
DEFROST CONTROL	ST CONTROL Microprocessor Controlled					
ELECTRIC CIRCUIT PROTECTION	CUT PROTECTION Fuse, Earth Wire					
REFRIGERANT CIRCUIT PROTECTION	MOROT PROTECTION Motor Protector					
LEG	Urethane (76mm DIA, 115mm HIGH)					
WEIGHT	77kg (Gross Approx. *kg)					
PACKAGE	Carton 965mm(W) x 780mm(D) x 950mm(H)					
OPERATING CONDITIONS	ERATING CONDITIONS Ambient Temperature: 5-43° C Voltage Range: Rated Voltage±6%					
*We reserve the right to make changes in specifications and design without prior notice.						

\*We reserve the right to make changes in specifications and design without prior notice.

- 1. Install the product properly in accordance with the instructions on location, electrical connections stated in the instruction manual provided. Allow 10mm extra space at the installation site to meet any installation requirements(additional spacing is also required for proper air flow and pipe connections).
- 2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 32° C and power supply of 230V 50Hz. The amperage and electric consumption are based on measurements at ambient temperature of 32° C and power supply of 230V 50Hz.

  3. The cabinet temperature range of -6 to 12° C is
- guaranteed at ambient temperature of 30° C.

  4. Product code: T012—C834

APPROVED CHECKED KAWAKAMI WANG		DESIGNED LIU		AWN HANG	SCALE 1/20		TRIGONOMETRY		
*	*		****		DATE	0045	DRAWING NO.		SYMBOL
APPROVED	DESIGNED	SYMBOL	DATE		2019.02.15		D24506		