



PRODUCT FEATURES

- New intelligent control circuit dedicated to saving power and water consumption.
- Inbuilt safety features freeze cycle back up timer, defrost back up, low voltage & high amp protector.
- New 7 segment operational display panel for ease of use.
- Unique closed cell water circuit for ultimate contamination protection.
- Durable stainless steel exterior.
- Easily accessible and cleanable air filters reduce costly callouts.
- Exceptionally hard crystal clear cubes that melt slowly.
- Auto rinse and flush cycle.
- 3 year parts and labour warranty on entire unit,
 5 year (parts only) on compressor & air cooled condenser coil.





TECHNICAL DRAWING

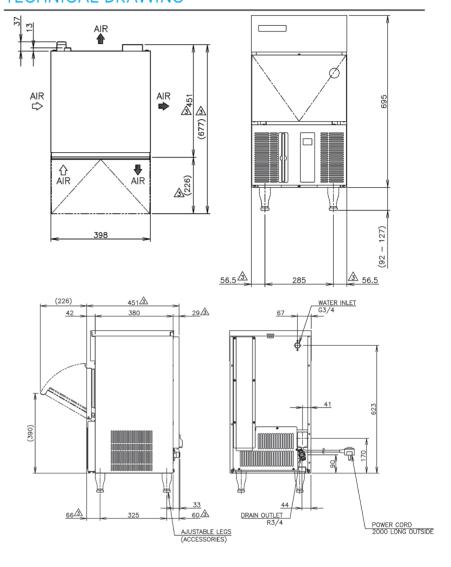

PRODUCT SPECIFICATION

Production Capacity	Approx. 22kg @10°C Air temp; 10°C Water
per 24hours	Approx. 18kg @21°C Air temp; 15°C Water
	Approx. 15kg @32°C Air temp; 21°C Water
Max Storage Capacity	Approx. 11.5kg
Freeze Cycle Time	Approx. 19 Min
Ice Production Per cycle	Approx. 0.27kg/21pcs
Dimensions	398mm (W) x 451mm (D) x 785mm (H)
	(Units include adjustable legs 90-125mm)
Cooling	Air
Weight Net/Gross (kg)	34 / 39
AC Supply Voltage	1 PHASE 220-240V 50Hz
Amperage	Running: 1.7A Rated: 1.7A Starting: 10A
Refrigerant Charge	R134a / 130g
Operating Conditions	Ambient Temp.: 1-40°C
	Water Supply Temp.: 5-35°C
	Water Supply Pressure: 0.07-0.8MPa (0.7-8bar)
	Voltage Range: Rated Voltage ±6%









