





## **PRODUCT FEATURES**

- Complete with stainless steel top.
- Standard with 4 shelves and 2 doors.
- Programmable electronic controller and display.
- 2 years parts and labour warranty.
- Comes standard with 4 x lockable (115 mm) castors (not legs).
- Optional Adjustable legs 150 180mm (Sold separately).

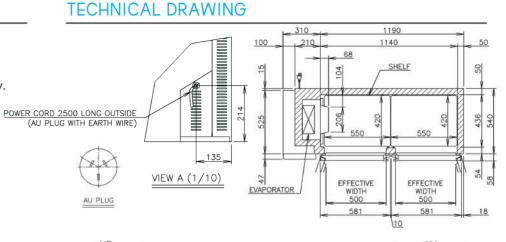





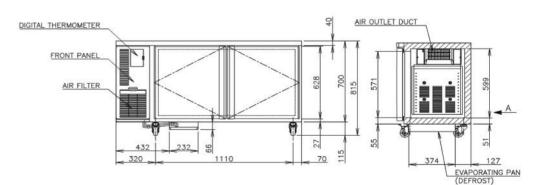

## PRODUCT SPECIFICATION

Interior	Stainless steel, ABS Plastic (Doors)
Exterior	Stainless steel, Galvanized Steel (Rear/Bottom), ABS plastic (Front Panel)
Max Storage Capacity	318L
Temperature Control	Microprocessor controlled
	Adjustable from -2 to 12°C
Evaporator	Fin & Tube type
Outside Dimensions	1500mm (W) x 600mm (D) x 815mm (H)
Inside Dimensions	1140mm (W) x 436mm (D) x 599mm (H)
Refrigeration System	Forced Air Circulation
Weight Net/Gross (kg)	80 / 114
AC Supply Voltage	1 PHASE 230 50Hz
Amperage	Rated: 1.9A
Refrigerant	R134A / 110g
OperatingConditions	Ambient Temp.: 5-38°C
	Voltage Range: Rated Voltage ±6%



Descriptions and specifications are subject to change at any time, without notice. Illustrations for demonstration purposes.

Copyright © 2019 Hoshizaki Lancer Pty Ltd. All right reserved. E&OE Date: Oct 2019

